Performance Test Results

Category 5e Patch Panel

Test Summary: PASS
Tester: Fluke model DTX-1800

Proven performance with minimum 13.0 dB Headroom @ 100 Mhz!

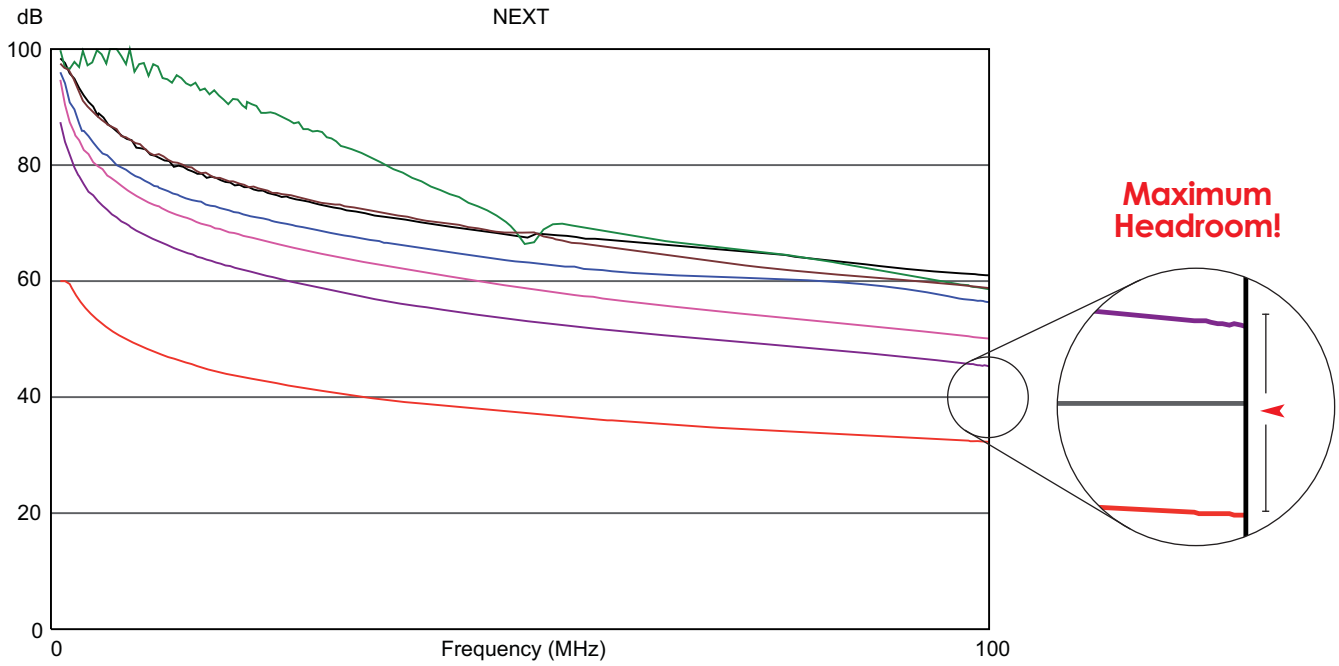

TIA Category 5e Permanent Link performance test results

	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	36-45		36-45	
NEXT (dB)	13.0		13.0	
Freq. (MHz)	99.3		100.0	
Limit (dB)	32.4		32.3	

Item Number: **ICMPP0245E**
24-Port, CAT 5e, 1 rack mount space



© Copyright 2008, ICC. ICC and ICC logo are registered trade name and trademark. All rights reserved. 0808 ISO 9001:2000 Registered